

SIDE MOUNTED 5-TIER PULL-OUT SHOE RACK LH





Assembly and fitting instructions

ono
ston™


IMPORTANT - The unit has a maximum loading limit of 20kg. Load should be evenly distributed across all racks with maximum load capacity for each rack not exceeding 4kg. All fixings supplied must be used for installation. Illustrations show left handed version.

Please note maximum overall dimensions of product including runners are 905mm (h) x 350mm (w) x 480mm (d).

- Parts**
- A x6 M4 x 16mm countersunk screw
 - B x2 M4 x 8mm countersunk screw

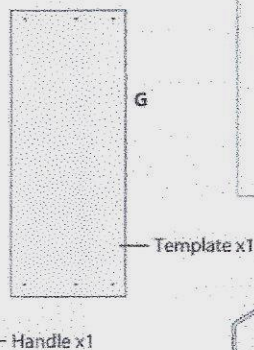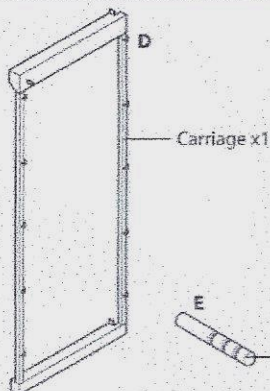


Tools required




Please ensure that all the above fittings are present before installation begins.


- 1** Mark screw positions for runners on left hand side of cabinet or use the installation template included.

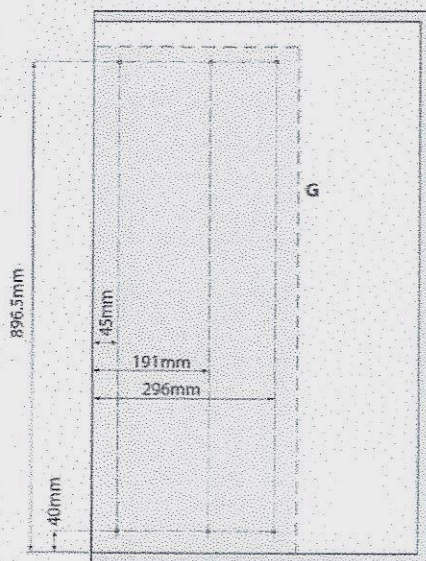


- 2** Secure runners to cabinet side using screws (A).

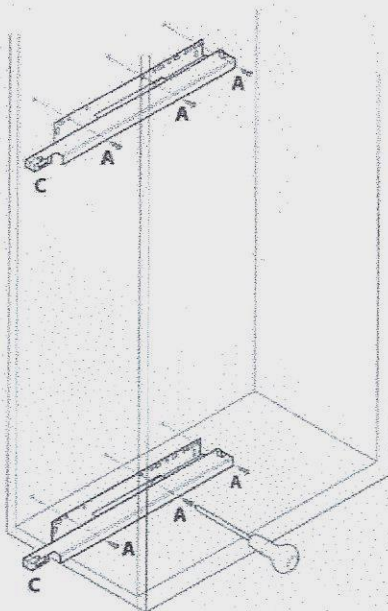


- 3** Slide carriage onto runners ensuring the carriage sits under the back retaining lugs. Fully extend carriage and secure to top and bottom runners using screws (B).

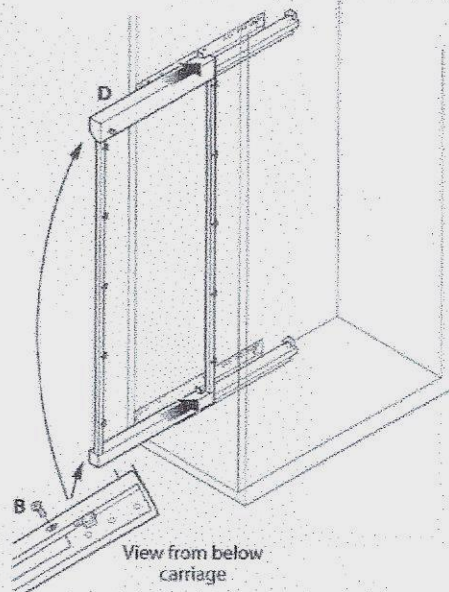

- 4** Fit the opening handle (E) to the carriage.

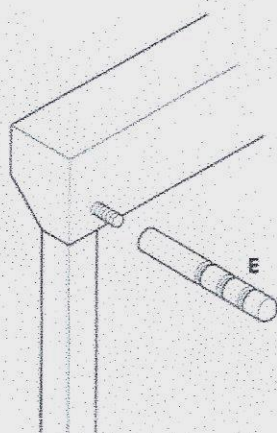

- 5** Fit the shoe racks to the carriage.

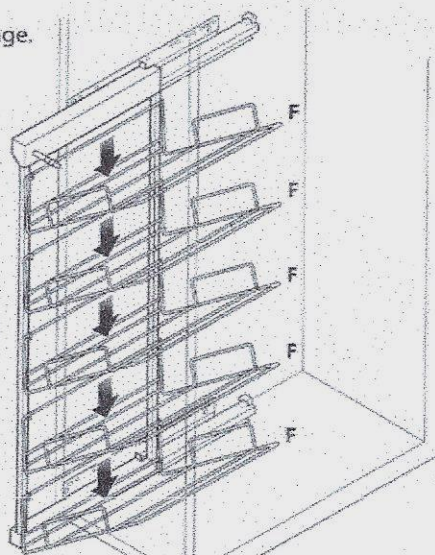

20 kg



IMPORTANT - The unit has a maximum loading limit of 20kg.